

Digital insulation tester



Remote control
by App



Illustrative image

Features

- Insulation resistances up to 10 TΩ
- Step voltage test, dielectric discharge and ramp test
- Remote control through an Android app
- Automated tests: Absorption index, polarization index, capacitance, leakage current and AC/DC voltmeter
- Switchable filter to remove external noise interference
- Auto-range
- Built-in printer
- USB interface
- 16,000 readings memory
- Software for data management
- Powered by rechargeable LFP battery
- IP65 protection

LFP Rechargeable battery

Expected lifetime

2000 charge / discharge cycles (average).

Low self-discharge

When the equipment is not in use, battery charge decreases with time at a much lower rate than other battery technologies.

Safety

In contrast to other lithium battery technologies commonly used, LFP batteries are thermally and chemically stable, significantly improving battery safety.

Description

The digital insulation tester model **MD10KVR** is MEGABRAS cutting edge insulation analyzer equipment and it is one of the most complete and sophisticated available in the international market. Its proven technology provides safe, reliable and accurate measurements of insulation resistances up to 10 TΩ, with 4 preselected test voltages, 500 V - 1 kV - 5 kV - 10 kV. Other test voltages may be selected in steps of 25 V or 500 V.

A state-of-the-art microprocessor controls the equipment operation and enables the incorporation of advanced features which make measurements easier: auto-range selection, AC/DC voltmeter, automatic measurement of absorption index, polarization index, leakage current and capacitance, timer enabling programming of test duration, configurable pass-fail test, dielectric discharge, ramp test, step voltage test, built-in printer, real time clock and calendar.

The **MD10KVR** is powered by a rechargeable LFP battery. The cabinet is strong and lightweight, easy to carry, impact-resistant and suitable to be used under severe weather conditions. Thus the megohmmeter supplies very reliable and accurate measurements both in laboratory and out in the field.

Remote control by Android™ App



Increased safety and comfort: Set up, start and stop tests in an even safer and more comfortable way

Automatic reports: Generate test reports directly on the App

Smartphone / tablet features: Incorporate smartphone features into your reports (photo, GPS coordinates and test location map)

• Android, Google Play and the Google Play logo are trademarks of Google LLC

Modbus® Protocol

This equipment implements the Modbus® open protocol. All configuration, real-time control, monitoring of measurements, and retrieval of test information can be performed using commercial tools such as LabVIEW® and PLCs, or even through dedicated software and own development. In this way, the entire measurement and analysis process can be automated according to the application's needs. Complete documentation with accessible and controllable parameters is provided, as well as clarification of doubts about the use through technical support.

- Modbus is a registered trademark of Schneider Electric USA, Inc.
- LabVIEW is a registered trademark of National Instruments Corporation

Technical specifications

ELECTRICAL		MD10KVR
Test voltages	500 V, 1 kV, 5 kV, 10 kV directly, one button selectable 50 V to 10 kV in 25 V or 500 V steps. DC, negative	
Maximum resistance reading	10 TΩ @ 5 kV up to 10 kV 5 TΩ @ 1 kV up to 4.99 kV 1 TΩ @ 525 V up to 999 V 500 GΩ @ 500 V	
DC voltmeter	15 V up to 1,000 Vdc Accuracy: ± (5 % of reading + 3 digits)	
AC voltmeter	15 V up to 1,000 Vrms. Accuracy: ± (5 % of reading + 3 digits)	
Leakage current measurement	1 nA up to 1,500 μA Accuracy: ± (10 % of reading + 3 digits)	
Capacitance measurement	50 nF up to 10 μF @ 500 V 50 nF up to 5 μF @ 1,000 V 30 nF up to 2 μF @ 2,500 V 30 nF up to 1 μF @ 5,000 V 30 nF up to 680 nF @ 10,000 V Accuracy: ± 10 % of reading ± 3 digits	
Short circuit current	Max. 2 mA	
Test voltage accuracy	± 3 % of nominal test voltages on 10 GΩ	
Insulation tester basic accuracy	± 5 % of reading 1 MΩ to 1 TΩ @ 10 kV ± 20 % of reading 1 TΩ to 10 TΩ @ 10 kV (for lower test voltages, the upper limit will be reduced proportionally) ± 20 % of reading ± 5 digits 10 kΩ to 100 kΩ ± 10 % of reading ± 5 digits 100 kΩ to 1 MΩ	
FEATURES		
Advanced features	<ul style="list-style-type: none"> • Dielectric discharge • Ramp test • Automated polarization index calculation • Automated dielectric absorption ratio calculation • Programmable pass-fail test • Step voltage test • 16,000 readings memory • Switchable filter to remove external noise interference 	
Filter function	Minimizes interference in resistance measurements	
Display	Alphanumerical LCD display, 4 lines / 20 characters (Big Number)	
Built-in printer	Prints elapsed time, actual voltage and resistance measured each 15 seconds	
Built-in chronometer	Shows elapsed time in mm:ss format. Count starts automatically for each measurement	
COMMUNICATION		
Protocol	Modbus	
USB	For configuration, control and download the stored values	
Bluetooth	For configuration, control and download the stored values	

SOFTWARE	
Desktop (PC/Notebook)	MegaLogg 3 software: for remote control, allowing to configure, run tests and generate reports
Android (Smartphone/ Tablet)	BlueLogg app: for remote control, allowing to configure, run tests and generate reports
STANDARDS	
Safety class	IEC 61010-1
Overvoltage protection	CAT III - 600 V
EMC	IEC 61326-1
Electromagnetic irradiation immunity	IEC 61000-4-3
Electrostatic immunity	IEC 61000-4-2
ENVIRONMENTAL	
IP rating	IP65 (with closed lid)
Operating temperature	-10 °C to 50 °C
Storage temperature	-25 °C to 70 °C
Humidity range	95 % RH (non condensing)
POWER SUPPLY	
Rechargeable battery	LFP, 12 V - 6000 mAh
Battery charger	AC Adapter (12 V - 2 A)
MECHANICAL (OF THE INSTRUMENT)	
Weight	Approx. 6.3 kg
Dimensions	450 x 360 x 190 mm

Included accessories

- 2 measuring test leads
- GUARD test lead
- AC Adapter
- USB cable
- User manual
- MegaLogg 3 software (download)
- BlueLogg App (download)
- Carrying bag

Smartphone App




Remote control by App

MEGABRAS equipment that has Bluetooth® interface can be controlled remotely via an Android™ smartphone / tablet running the BlueLogg application. Set the parameters, start / stop a test, save the data and generate reports.



- Real-time measurement
- Test details
- Test Start / Stop

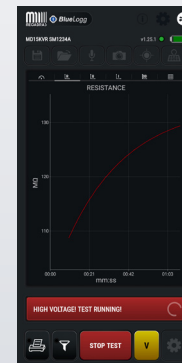

TEST #	DATE	DA INICIO	P	C	DD
14	15/05/2013 16:04				

Increased safety


The BlueLogg communicates with the equipment through a Bluetooth® connection, allowing remote control of the tests, further increasing user safety in tests with potential risks.



Smartphone features and automatic reporting

Record voice comments for each of the measurements, generate automatic test reports directly in the App. Incorporate smartphone / tablet features into the report (picture, GPS coordinates and map of the test site).


- Voice annotation
- Pictures
- GPS coordinates
- Map

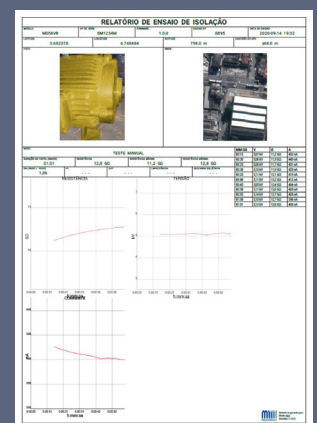

Using the remote control does not require Internet connection (the Internet is only necessary if you want to see a map of the test site or send reports by email).



- Android, Google Play and the Google Play logo are trademarks of Google LLC
- Bluetooth is a registered trademark of the Bluetooth SIG, Inc. Worldwide



Desktop software

MegaLogg 3

Software for remote control and reporting

MegaLogg 3 communicates with the equipment through a USB connection. Set the parameters, start / stop a test, save the data and generate reports.

Real-time measurement (points to the left sidebar with equipment details and controls)

Test results (points to the right sidebar with graphs and data table)

minutes	U	R	I
00:10	5.05 kV	112 MΩ	45.0 μA
00:20	5.12 kV	119 MΩ	44.4 μA
00:25	5.07 kV	117 MΩ	43.1 μA
00:30	5.09 kV	119 MΩ	42.4 μA
00:35	5.13 kV	121 MΩ	42.1 μA
00:40	5.05 kV	122 MΩ	40.9 μA
00:45	5.09 kV	124 MΩ	40.6 μA
00:50	5.13 kV	120 MΩ	40.7 μA
00:55	5.13 kV	122 MΩ	40.3 μA
01:00	5.11 kV	122 MΩ	39.9 μA
01:05	5.09 kV	120 MΩ	39.3 μA
01:10	5.11 kV	120 MΩ	38.5 μA
01:15	5.12 kV	122 MΩ	39.4 μA
01:20	5.11 kV	120 MΩ	38.1 μA

Available for download at: www.megabras.com/megalogg

Test settings

Dialog box for configuring test parameters such as Mode, Voltage, Resistance, Current, and Test duration.

Report settings

Dialog box for configuring report generation options, including Brand Logo, Company data, Operator's list, and Customers' host sites.

Trend analysis (insulation testers and micro-ohmmeters)

Interface for viewing historical test data and trends over time.

#	Description	Date	Duration	R	U	I	DA	PI	SVT	CA
152		17/09/2019	05:10	162 MΩ	498 V	2.72 μA	1.54	41
240		04/04/2020	10:00	174 MΩ	497 V	2.55 μA	1.30	41
145		03/09/2020	09:20	181 MΩ	498 V	2.45 μA
153		08/07/2022	01:15	168 MΩ	496 V	2.74 μA	1.35	41

Report generation

Interface for generating and viewing test reports, including a preview of the report layout.

Global Presence

MEGABRAS equipment are used in more than 40 countries around the world



Test & Measurement equipment

Digital transformer ratiometer
Earth ground testers
Hipots
Insulating glove tester
Insulation testers
Kilovoltmeters
Micro-ohmmeters
Power quality analyzers
Vibration meter



MEGABRAS IND. ELETRÔNICA LTDA.

Rua Gibraltar, 172 - Santo Amaro
CEP 04755-070 - São Paulo - SP
Brazil

For more information

Phone : +55 (11) 3254-8111 / 5641-8111
E-mail : megabras@megabras.com
Site : www.megabras.com